



# YellowScan Mapper.

## The next generation of integrated UAV LiDAR solution

YellowScan Mapper is next generation of integrated lidar solution.

It's low weight , mid-range capability, top-end point density and advanced accuracy and precision, makes it the best value for money in our portfolio.

It is dedicated to UAV borne mapping applications.



Technologies inside

applanix **LIVOX**



Key differentiators

- ▶ High point density
- ▶ Compact
- ▶ Advanced point cloud precision



UAV Integrations

- ▶ Multirotor drones
- ▶ Helicopter drones
- ▶ Fixed-wings

## Technical specifications.

Scanner	Livox Horizon
Wavelength	905 nm
Precision <sup>(1) (3)</sup>	2 cm
Accuracy <sup>(2) (3)</sup>	3 cm
Scanner field of view	81.7 °
Shots per second	240k
Echoes per shot	Up to 2
GNSS-Inertial solution	Applanix APX-15 UAV

## Package includes.

### ✓ Hardware:

- ▶ YellowScan Mapper
- ▶ DJI Skyport adapter for M300 / M200
- ▶ Charger and 2 batteries
- ▶ GNSS antenna and cable
- ▶ 2 USB flash drives

### ✓ Services:

- ▶ Boresight calibration certificate
- ▶ 1-year warranty
- ▶ In-person training
- ▶ Worldwide technical and operational support

## General characteristics.

Weight	1.4 kg (3.1 lbs) battery included
Autonomy	1.5 hours typ.
Power consumption	19 W
Operating temperature	-20 to +40 °C
Size	L 14.4 x W 9.5 x H 14.2 cm

(1) Precision, also called reproducibility or repeatability, accounts for the variation in successive measurements taken on the same target.

(2) Accuracy is the degree of conformity of a measured position to its actual (true) value.

(3) One  $\sigma$  @ 50 m, nadir.


### ✓ Software:

- ▶ Applanix POSPac UAV, to post-process GNSS and inertial data for highest accuracy
- ▶ YellowScan CloudStation, to generate and visualize your georeferenced point cloud

### ⊕ Optional:

- ▶ Mounting bracket for DJI M600
- ▶ Single 20 Mpx camera module
- ▶ YellowScan LiveStation, the real-time in-flight LiDAR monitoring kit (software + 2 radio-modems)
- ▶ Warranty and technical support extensions

## Typical mission parameters.

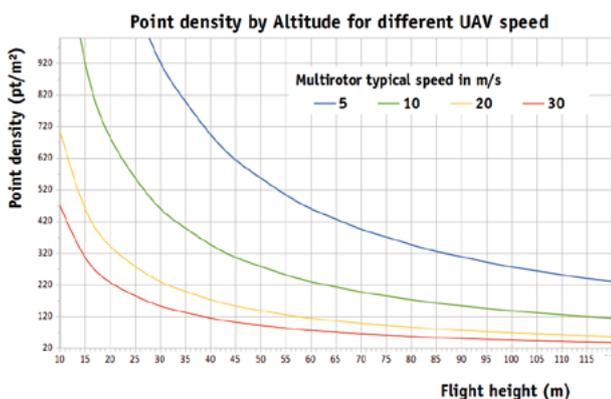

FLIGHT SPEED  
10 - 20 m/s



ALTITUDE  
70 m



SWATH  
120 m